



Brings you the best in Retail Technology

E-Touch Mini PoS 562

Small, but big on speed and capability, the POS562 is a stylish all-in-one POS system specifically designed for most retailers' needs. The POS562 possesses 2 USB ports and thermal printer at the front of the system for easy installation. Its 1024x768 pixel resolution color touch-resistive monitor has spill-proof design and it has a foldaway stand, providing two view angles with convenience and comfort. In addition to its compact structure, the well-managed cable management design supports simple cable routing that helps to make a friendlier working environment. The versatile I/O interfaces located at the rear side allow great connectivity to optional POS peripherals include magnetic card readers, flush mount VFD screen, and 7" second display. The POS562 is ideal for various markets and easy to maintain, it will most likely be your best choice for your business



Advantages

- Serviceability and Maintenance
 - Easy service for System with Printer
 - 12.1" base design with 2 view angle by retractable foot
- Fanless Design
 - Intel® Atom™ N270 Processor for noise-less terminal

Features



12.1" true flat touch monitor



Versatile I/O ports



Optional MSR / VFD screen / Second Display



Foldaway stand




Easy loading thermal printer



Slide-in hard disk for easy service

POS 562

Mini POS Hardware System

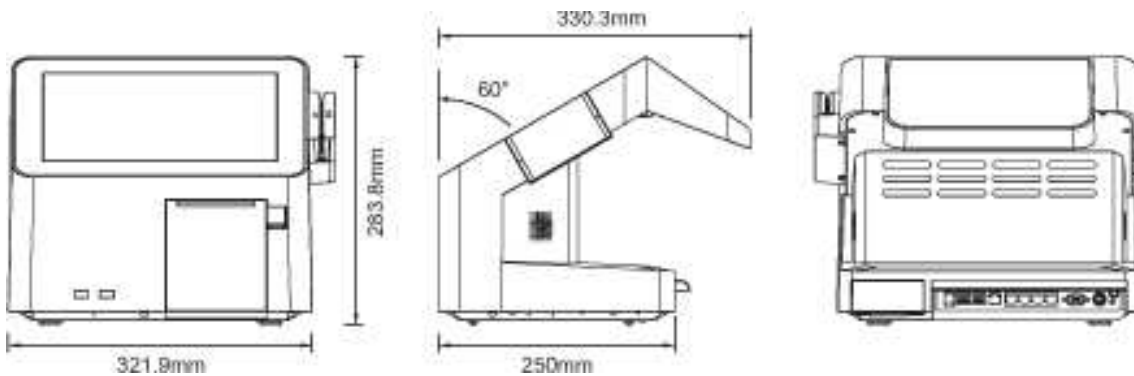

Specifications

Model Name	POS 562	
Mainboard	C36A	
Processor	Intel® Atom™ N270 Processor 1.6GHz L2 512K FSB 533MHz	
Chipset	Intel® 945GSE Express + ICH7M	
System Memory	1 x DDR2 DIMM up to 2GB	
Graphic Memory	Share System Memory up to 224MB	
LCD Touch Panel		
LCD Size	12.1" TFT (LED backlight type)	
Brightness	500 cd/m ²	
Resolution	1024X768	
Touch Screen	12.1" Resistive	
Storage Device		
Hard Drive	1 x 2.5" HDD (SATA interface) / SSD	
System I/O Ports		
USB Port	6 (2 front+4 rear)	
Serial Port	4 x RJ-45 COM (Powered COM3/COM4 +5V/+12V configured by jumper)	
LAN Port	1 x RJ-45 (10/100/1000 Mbps Giga LAN)	
Second Display	1 x Female type connector with power by jumper setting	
DC In 19V	1	
Cash Drawer	1 x RJ-11 (12V/24V cash drawer)	
Power Button	1	
Audio		
Internal Speaker	2 x 3W internal speakers	
Power		
Power Supply	Adapter (DC 90W, 19V, 4.7A)	
Printer	3" easy loading thermal printer with auto cutter up to 170mm / sec (COM6/USB)	
Communication		
Wireless LAN (optional)	Mini PCI-e WLAN card IEEE 802.11 a/b/g	
Main Modules	MSR	VFD / 7" Second Display
Component type	3 Tracks (PS2 / COM6)	2 x 20 (USB), 7" LCD with touch (USB)
Certificate		
EMC & Safety	FCC Class A / CE Mark / LVD / CB	
Environment		
Operating Temperature	5°C ~ 35°C (41°F ~ 95°F)	
Storage Temperature	-20°C ~ 55°C (-4°F ~ 131°F)	
Dimension (W x D x H)	321.9 x 250 x 283.8 mm / 12.7" x 9.8" x 11.2"	
Weight	7.4kg (10.5lbs)	
OS Supported	Windows® XP Professional, Windows® Embedded, POSReady 2009, Windows® XP Embedded, Windows® XP Professional for Embedded, Windows® 7, Linux	

Shweta POS Systems
501, Gopal Towers,
Near Maninagar RLY Station,
Maninagar,
Ahmedabad – 380008
Gujarat
Tel: +91-9099094199

E-mail: sales@shwetapossystem.com
Web: www.shwetapossystems.com



