




Brings you the best in Retail Technology

E-Scan 9600

Laser Barcode Scanner



DIMENSIONAL DRAWING

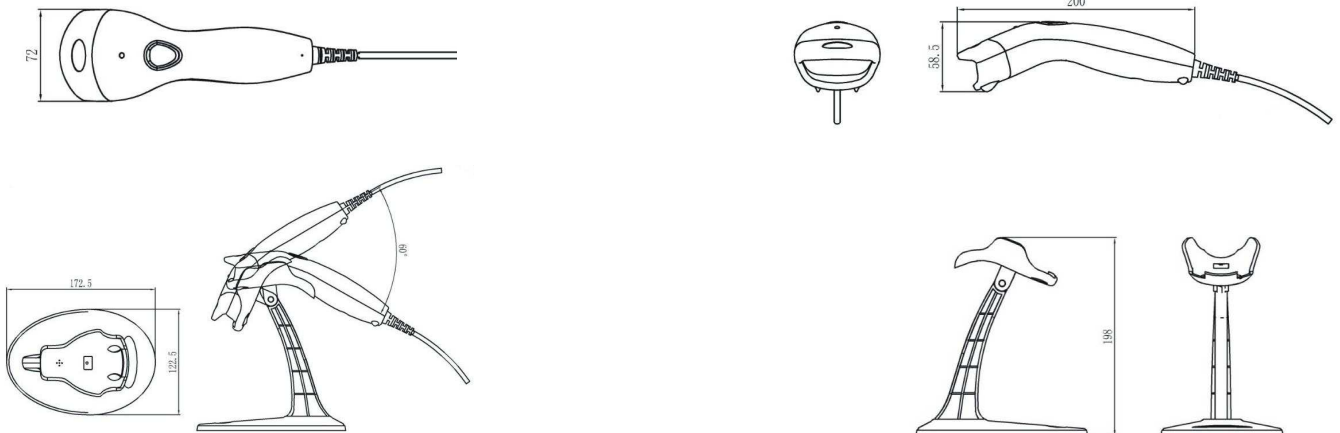

Specification

Optical	Scanner Type	Bi-directional
	Light Source	650 - 670nm (visible)
	Scan Rate	100 scans per second
	Resolution	0.10mm (4mil) PCS0.9
	Reading Distance	2.5 - 600mm (100% UPC/EAN)
	Print Contrast	30% minimum reflective difference
	Dimensions	L200mm x W72mm x H58.5mm
	Weight	480g (with stand)
	Scanning angle	Inclination angle 45°, Elevation angle 60°
	Decode Capability	UPC/EAN, UPC/EAN with Supplementals, UCC/EAN 128, Code 39, Code 39 Full ASCII, Trioptic Code 39, Code 128, Code 128 Full ASCII, Codabar, Interleaved 2 of 5, Discrete 2 of 5, Code 93, MSI, Code 11, RSS variants, Chinese 2 of 5
	Interfaces Supported	Keyboard Wedge, RS232, USB
Power	Current Consumption	100mA (Idle Current < 40mA)
	Voltage Requirement	5VDC ± 5%
Environment	Operating Temperature	0°C - 50°C / 32°F to 122°F
	Storage Temperature	-40°C - 70°C / -40°F to 158°F
	Relative Humidity	5% - 95% (non condensing)
	Shock	1.5m drop on concrete surface
	Ambient Light Immunity	Immune to direct exposure of normal office and factory lighting conditions, as well as direct exposure to sunlight
	Electrostatic Discharge	Conforms to ±15KV air discharge and ±8KV of contact discharge
Safety	CORH class 2 laser product, FCC class B and CE	



Shweta POS Systems
501, Gopal Towers,
Near Maninagar RLY Station,
Maninagar,
Ahmedabad – 380008
Gujarat
Tel: +91-9099094199

E-mail: sales@shwetapossystem.com
Web: www.shwetapossystems.com


shweta
 POS SYSTEMS

